




MAX. OPERATING WEIGHT: 37.1 tonnes (81791 lb) MAX. HORSEPOWER: 201 kW (270hp)

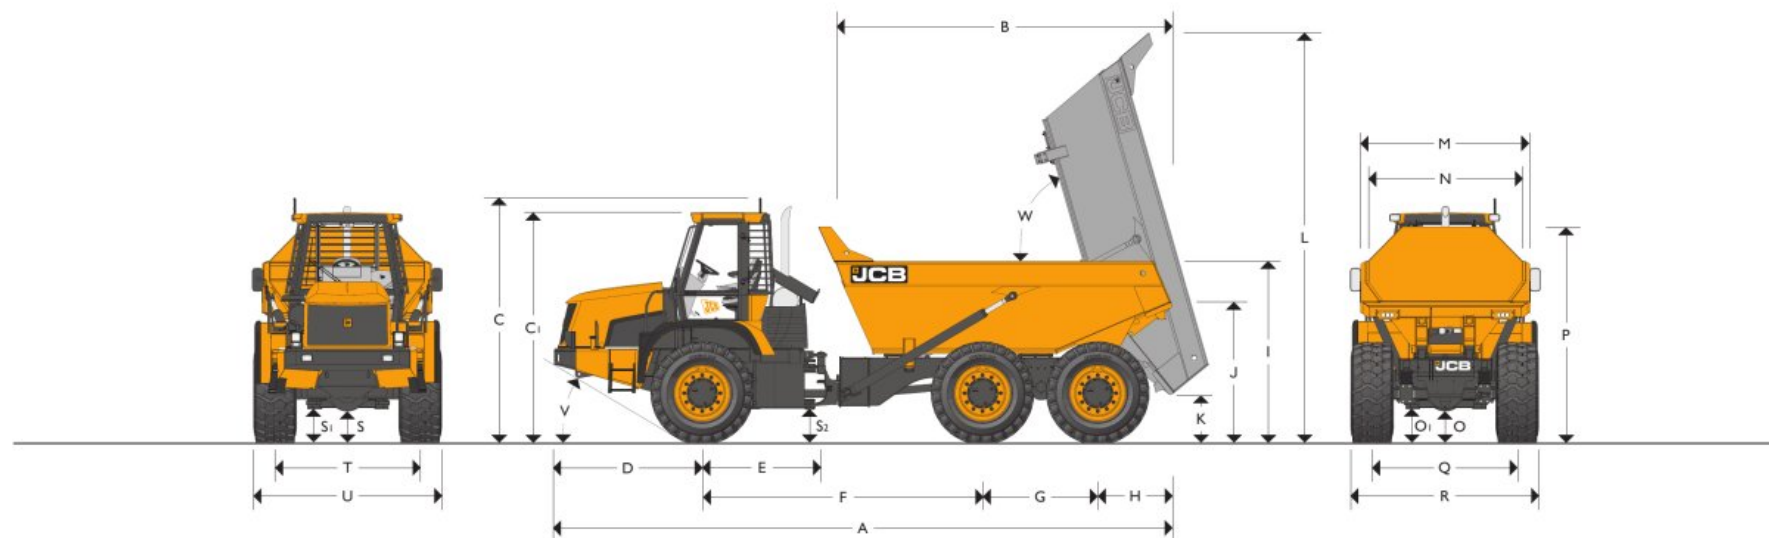

STATIC DIMENSIONS

	mm (ft-in)
A Overall length	9199 (30-2)
B Body length	5030 (16-6)
C Max. height	3446 (11-3)
Ci Height to top of cab	3310 (10-9)
D Front axle to front bumper	2174 (7-1)
E Front axle to pivot point	1575 (5-2)
F Wheelbase (front axle to intermediate axle)	4245 (13-9)
G Wheelbase (intermediate axle to rear axle)	1675 (5-5)
H Rear axle to rear of body	1105 (3-6)
I Height to top of body	2609 (8-6)
J Height to lip of body	2033 (6-7)
K Min. height to body when tipped	635 (2-0)
L Max. height to body when tipped	5947 (19-5)
M Max. external body width	2492 (8-2)
N Max. internal body width	2342 (7-7)
O Max. ground clearance (rear diff)	433 (1-4)

		mm (ft-in)
Oi Max. ground clearance (rear axle)		512 (1-7)
P Height to top of spill guard		3097 (10-2)
Q Wheel track (rear)		2122 (6-10)
R Overall width		2652 (8-7)
S Max. ground clearance (front diff)		433 (1-4)
S1 Max. ground clearance (front suspension arm)		373 (1-2)
S2 Ground clearance (pivot point)		420 (1-4)
T Wheel track (front)		2122 (6-10)
U Overall width		2652 (8-7)
V Departure angle (front)	degrees	30°
W Body tip angle	degrees	74°
Load capacity	tonnes (lb)	20 (44092)
Body – heaped	m³ (yd³)	12.0 (15.7)
Body – struck	m³ (yd³)	9.4 (12.3)
Body w/tailgate – heaped	m³ (yd³)	12.43 (16.25)
Body w/tailgate – struck	m³ (yd³)	9.6 (12.6)

Overall dimensions based on an unladen machine equipped with Michelin 20.5 R25 XADN tyres.